

# ETERNABOND®

featuring




MICROSEALANT®  
TECHNOLOGY

# ETERNAPOCKET

## PITCH POCKET

**WATERTIGHT, EASY TO INSTALL PITCH PAN FOR NEW OR EXISTING ROOF PENETRATIONS. "THE WRAPPABLE PITCH POCKET!"**

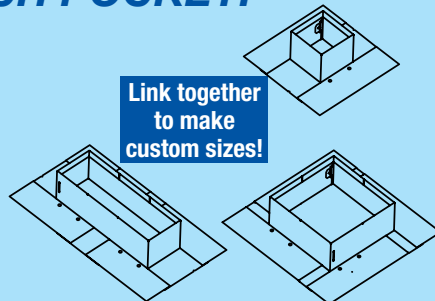

Link together  
to make  
custom sizes!

- No need to disconnect linesets or cut piping or vents.
- Just wrap the EternaPocket around the penetration then peel & stick for a PERMANENT waterproof seal.
- Connect as many together as you need for larger size penetrations.
- Works on all roof types.
- Easy to use - Do-it-yourself . . . Saves Time . . . Saves Money!!

Simple to use.  
Easy Installations.



Optional - Counter  
flash for roof  
matching finish.


Available in White,  
Black, Gray, Tan,  
Aluminum, Copper



**Product: 4" x 4" pitch pan 24 gauge G-90 galvanized steel**  
**Overall dimensions are as shown:**

Nominal Size:	You need:	EternaPocket Sealant	LENGTH	WIDTH	HEIGHT	OVERALL LENGTH
4 x 4	One 4x4	One Tube	4"	4"	2-1/2"	10" 10"
4 x 12	Two 4x4's	Three Tubes	4"	12"	2-1/2"	10" 18"
8 x 8	Two 4x4's	Four Tubes	8"	8"	2-1/2"	14" 14"
12 x 12	Three 4x4's	Eight Tubes	12"	12"	2-1/2"	18" 18"

\* Assumes minimally sized penetrations. Deduct one tube for each 48.5 cubic inches of displacement.

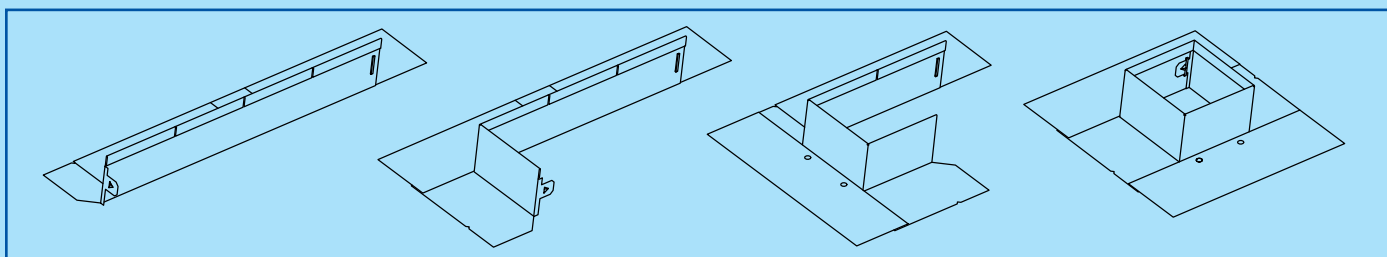

To make any of the larger sizes, just fold two EternaBond EternaPockets into L shapes and assemble together per instructions.

# Easy Installations - With or Without Existing Linesets or Pipes. Do it Yourself - Make more Profit on your next job!



1 Fold EternaPocket at hinges by hand



(Existing Lineset Shown)

2 Easy-Connect tabs - No special tools required.



3 Apply MicroSealant Putty Tape to roof (2 layers)



4 Remove both release liners



5 Place EternaPocket in position



6 Apply pressure to activate bonding



7 Ready for filling



8 Finish installation with EternaPocket Sealant

## ETERNAPOCKET PITCHPOCKET SEALANT



### PURPOSE

EternaBond EternaPocket Pitch Pocket Sealant is a one component, non-shrink, advanced technology sealant specifically designed for filling, sealing and re-sealing pitch pockets. Excellent adhesion to silicone also makes this product an ideal solution for sealing metal roof seams and fasteners and other roof areas where silicone sealant has been previously applied. It can be used with any type of metal or molded plastic pocket. It is specifically designed for custom manufactured EternaBond 4"x4" metal pitch pockets which can be combined to produce pans of various sizes and shapes.

### PRODUCT DESCRIPTION

EternaBond EternaPocket Pitch Pocket Sealant 100% solids moisture-cure sealant. It is semi self-leveling so that it can be used to fill pitch pockets and pans, seal gutters and metal roof fasteners with minimal tooling. Viscous enough to avoid drain out issues encountered with more liquid sealers. EternaPocket Pitch Pocket Sealant is 100% solids which results in zero shrinkage. Excellent adhesion to most roof surfaces including silicone. Conventional "quart" caulk tube packaging eliminates the requirement for custom application equipment and waste associated with larger packaging.

### APPLICATION

It is recommended that the roof surface inside the pan be wiped clean with solvent immediately before filling using EternaClean, acetone, laquer thinner, or a commercial splice wash. This will remove surface contamination and dramatically improve adhesion of the filler to PVC, TPO, Hypalon, EPDM and smooth surfaced asphalt and modified bitumen roofs. Insert cartridge into a standard "quart" size caulk gun. Cut tip, puncture seal and apply as desired. The material should be over filled slightly so that water doesn't sit in the pocket. Unused material can be saved by sealing the tip with tape or plastic film. For pitch pocket information, see the EternaPocket Product Data Bulletin. Shelf life: 12 months.

EternaBond Inc.  
75 E. Division Mundelein, IL 60060  
1-888-336-BOND (2663) [www.EternaBond.com](http://www.EternaBond.com)

